


# Installation


## Asfalto

Asphalt Asphalt Asfalto

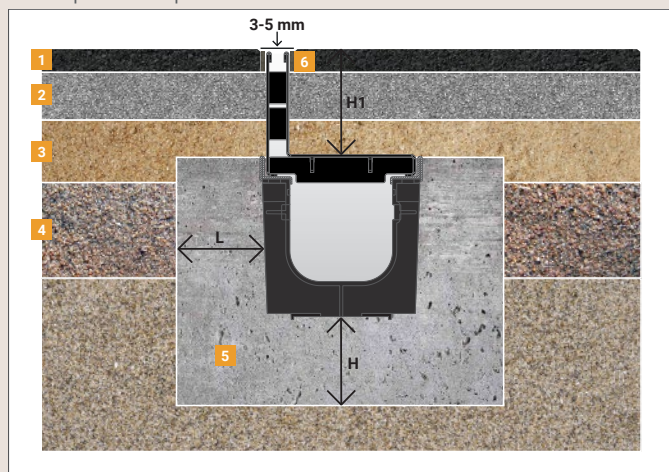


## Calcestruzzo

Concrete slab Béton Hormigòn

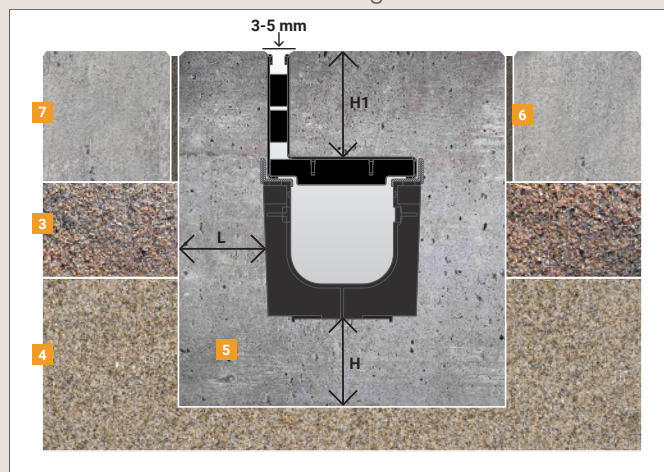


## Pavè D400 - C250 - B125

Self paving Pavè Autobloccante

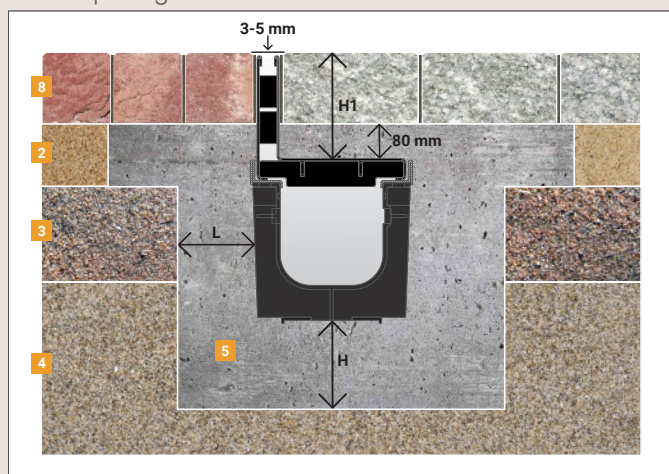

## Pavè A15

Self paving Pavè Autobloccante

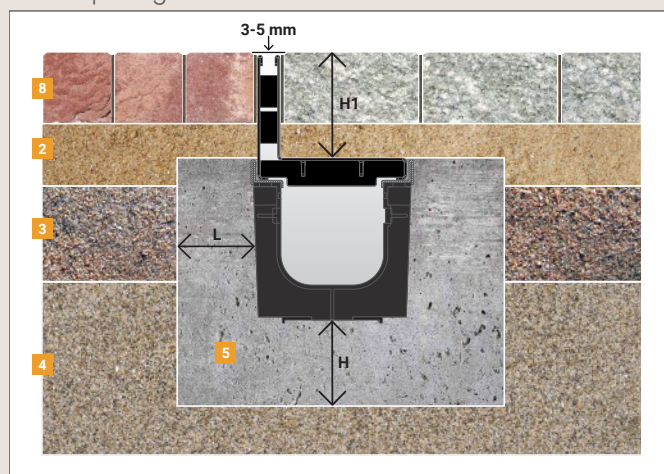

1	Strato di usura	Waring asphalt layer	Couche d'usure	Capa de desgaste
2	Strato inferiore (binder)	Lower layer (binder)	Couche inférieure	Capa inferior
3	Strato portante	Bearing layer	Couche porteuse	Capa de soporte
4	Terreno di sottofondo	Under backfill	Terrain double fond	Lecho
5	Rinfiaccio in calcestruzzo	Concrete backfill	Soutien en béton	Falcado lateral en hormigòn
6	Giunto di bitume	Bitumen joint	Joint en bitume	Tela asfàltica
7	Massetto in calcestruzzo	Concrete slab	Bloc en béton	Bordillo en hormigòn
8	Pavimentazione autobloccante	Self blocking paving	Dallage auto-bloquant	Pavimentaciòn autobloccante

## Dimensioni e caratteristiche del rinfiaccio in calcestruzzo

Dimensions and features of the concrete support

Dimensions et caractéristiques du support béton

	L mm	H mm	H1 mm	Rck (EN 206-1)	Consistenza Consistency Consistance UNI 9858	Cono di Abrams Abrams cone Cône d'Abrams UNI 9418	Aggregati Aggregate Aggregat D max	Cemento Cement Ciment	Dosatura Dosing Dosage
<b>A15</b>	100	50	80	C 25/30	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>
<b>B125</b>	100	100	100	C 25/30	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>
<b>C250</b>	150	100	150	C 25/30	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>
<b>D400</b>	200	150	200	C 25/30	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>
<b>E600</b>	200	200	200	C 30/37	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>
<b>F900</b>	250	200	250	C 35/45	S5	> 220 mm	8 mm	42,5 r	300 kg/m <sup>3</sup>